

Technical parameters

Model(s):	Outdoor unit: AW-YHPSA12-H93 Indoor unit: ODMA-160T-09M22-25
Air-to-water heat pump:	YES
Water-to-water heat pump:	NO
Brine-to-water heat pump:	NO
Low-temperature heat pump:	NO
Equipped with a supplementary heater:	NO
Heat pump combination heater:	NO
Declared climate condition:	AVERAGE

Parameters are declared for medium-temperature application.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.6	kW	Seasonal space heating energy efficiency	η_s	135.1	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = -7°C	Pdh	10.24	kW	Tj = -7°C	COPd	2.01	-
Tj = 2°C	Pdh	6.52	kW	Tj = 2°C	COPd	3.44	-
Tj = 7°C	Pdh	4.36	kW	Tj = 7°C	COPd	4.59	-
Tj = 12°C	Pdh	3.29	kW	Tj = 12°C	COPd	6.05	-
Tj = bivalent temperature	Pdh	10.24	kW	Tj = bivalent temperature	COPd	2.01	-
Tj = operating limit	Pdh	9.10	kW	Tj = operating limit	COPd	1.79	-
For air-to-water heat pumps: Tj = -15°C	Pdh	-	kW	For air-to-water heat pumps: Tj = -15°C	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	For air-to-water heat pumps: Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{cyh}	-	kW	Cycling interval efficiency	COP _{cyh}	-	-
Degradation co-efficient (**)	Cdh	0.9	--	Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{off}	0.020	kW	Rated heat output (**)	P _{sup}	1.23	kW
Standby mode	P _{sb}	0.020	kW	Type of energy input	Electrical		
Thermostat-off mode	P _{to}	0.030	kW				
Crankcase heater mode	P _{ck}	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L _{WA}	43/64	dB
Annual energy consumption	Q _{HE}	6928	kWh
For air-to-water heat pumps: Rated air flow rate, outdoors	-	4060	m ³ /h
For water-or brine-to-water heat pumps: Rated brine or water flow rate, outdoor heat exchanger	-	-	m ³ /h

For heat pump combination heater:			
Declared load profile	-		
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%
Daily fuel consumption	Q _{fuel}	-	kWh
Annual fuel consumption	AFC	-	GJ

Contact details AIRWELL RESIDENTIAL S.A.S. - 10 rue du fort de Saint Cyr - 78180 Montigny-le-Bretonneux - France


(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.




ENERG Y IJA
енергия · ενεργεια
IE IA

Airwell



AW-YHPSA12-H91
ODMA-160T-09M22-25



A⁺⁺

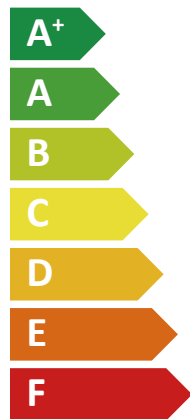

A⁺



2019


811/2013




ENERG Y IJA
енергия · ενεργεια
IE IA

Airwell



AW-YHPSA12-H93
ODMA-160T-09M22-25

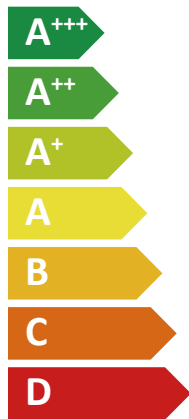

A⁺⁺

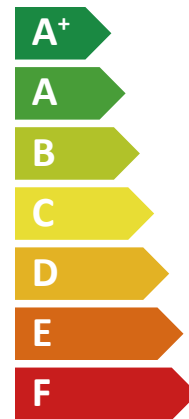

A⁺



2019

811/2013



ENERG Y IJA
 енергия · ενεργεια IE IA


Airwell

AW-YHPSA12-H91
 ODMA-160T-09M22-25



55°C

35°C

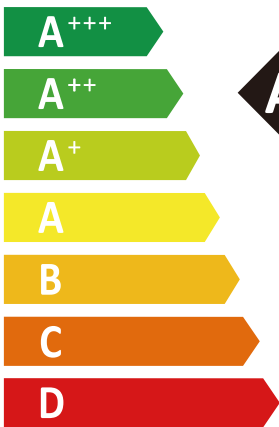

A ++

A +++

42dB

64dB

■ 10	■ 11
■ 12	■ 12
■ 12 kW	■ 11 kW

2019

811/2013



ENERG Y IJA
 енергия · ενεργεια IE IA

Airwell

AW-YHPSA12-H93
 ODMA-160T-09M22-25



55°C

35°C



A ++

A +++

42dB

64dB

■ 10	■ 11
■ 12	■ 12
■ 12 kW	■ 11 kW

2019

811/2013